

MODEL 2033

Ø24 MAX 300A DC AC A DATA HOLD AUTO POWER SAVE


- Smallest clamp meter capable of AC and DC current measurements
- 300A auto-ranging has minimum resolution of 0.01A AC/DC
- Zero adjustment of DC current is possible at the push of a button

CE



2033	
AC A	40/300A ±1%rdg±4dgt[50/60Hz](0 - 40A) ±2.5%rdg±4dgt[20Hz - 1kHz](0 - 40A) ±1.5%rdg±4dgt[50/60Hz](20 - 200A) ±2.5%rdg±4dgt[20Hz - 1kHz](20 - 200A) ±3.5%rdg[50/60Hz](200 - 300A) ±4%rdg[20Hz - 1kHz](200 - 300A)
DC A	40/300A ±1%rdg±4dgt(0 - ±40A) ±1.5%rdg±4dgt(±20 - ±200A) ±3%rdg(±200 - ±300A)
Conductor size	φ24mm max.
Frequency response	DC 20Hz - 1kHz
Applicable Standards	IEC 61010-1 CAT III 300V IEC 61010-2-032
Power source	LR44(1.5V) × 2 *Continuous measuring time : Approx. 10 hours (Auto power save : Approx. 5 minutes)
Dimension	147(L) × 59(W) × 25(D)mm
Weight	Approx. 100g
Accessories	9090 (Carrying case) LR44 × 2 Instruction manual

LAYOUT DIAGRAM

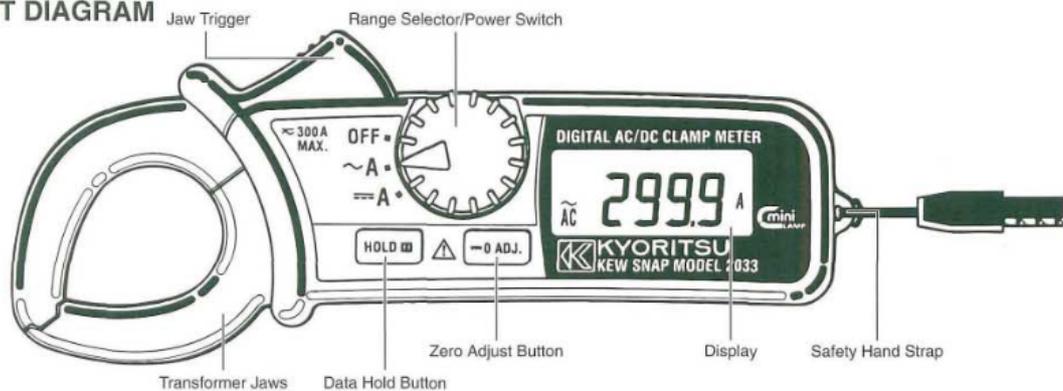

**COSINUS Messtechnik - Ihr Partner für Messlösungen
in allen elektrischen und physikalischen Anwendungen**

COSINUS Messtechnik GmbH

Rotwandweg 4

82024 Taufkirchen

Tel.: 089 / 66 55 94 - 0

Fax: 089 / 66 55 94 -30

office@cosinus.de
www.cosinus.de