


EARTH TESTERS

MODEL 4102A Soft case model
MODEL 4102A-H Hard case model

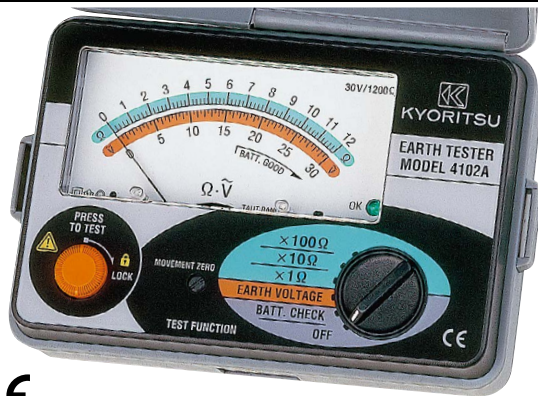

CE

	4102A/4102A-H		
Earth resistance measurement	$\times 1\Omega$ Range	$\times 10\Omega$	$\times 100\Omega$
Measuring range	0 - 12 Ω	0 - 120 Ω	0 - 1200 Ω
Accuracy	$\pm 3\%$ of full scale		
Earth voltage measurement			
Measuring range	0 - 30 V AC (50/60Hz)		
Accuracy	$\pm 3\%$ of full scale		
Overload protection	Earth resistance : 276V AC/DC (10 seconds) Earth voltage : 276V AC/DC (10 seconds)		
Applicable Standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-030, IEC 61557-1, 5, IEC 60529(IP54)		
Power source	R6(AA)(1.5V) $\times 6$		
Dimension	105(L) $\times$ 158(W) $\times$ 70(D) mm (including case lid)		
Weight	Approx. 600g (including batteries and case lid)		
Accessories	7095A(Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set)) 7127B(Simplified measurement probe) 8032(Auxiliary earth spikes(2spikes/1set)), 9121(shoulder strap) R6(AA) $\times 6$, Instruction manual 9084(Carrying case for 4102A), 9164(Carrying case [Hard] for 4102A-H)		
Optional Accessories	7245A(Precision measurement cord set) 8259(Adapter for measurement terminal)		

KEW 4105A Soft case model
KEW 4105A-H Hard case model



CE

	4105A/4105A-H		
Earth resistance measurement	20Ω	200Ω	2000Ω
Measuring range	0.00 - 1999 Ω		
Display range	0.00 - 19.99 Ω	0.0 - 199.9 Ω	0 - 1999 Ω
Accuracy	±2%rdg±0.1 Ω	±2%rdg±3dgt	
Earth voltage measurement			
Measuring range	0 - 200 V AC (50/60Hz)		
Display range	0.0 - 199.9 V		
Accuracy	±1%rdg±4dgt		
Overload protection	Earth resistance : 280V AC (10 seconds) Earth voltage : 300V AC (1 minute)		
Applicable Standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-030, IEC 61557-1, 5, IEC 60529(IP54)		
Power source	R6(AA)(1.5V) × 6		
Dimension	105(L) × 158(W) × 70(D) mm (including case lid)		
Weight	Approx. 550g (including batteries and case lid)		
Accessories	7095A(Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set)) 7127B(Simplified measurement probe) 8032(Auxiliary earth spikes[2spikes/1set]), 9121(shoulder strap) R6(AA) × 6, Instruction manual 9084(Carrying case for 4105A), 9165(Carring case [Hard] for 4105A-H)		
Optional Accessories	7245A(Precision measurement cord set) 8259(Adapter for measurement terminal)		

Features(4102A/4105A)

- 3-Pole and 2-Pole Earth Resistance
- The latest circuit design permits the instrument to operate with the minimum of influence from earth voltage and earth resistance of auxiliary earth spikes
- Dust and drip proof (designed to IEC 60529 IP54)
- Earth resistance value can be read directly from the scale
- Designed to meet IEC 61010-1 safety standard
- Capable of measuring earth voltage
- Small and lightweight. Shock resistant new case material
- 2mA measuring current permits earth resistance tests without tripping earth leakage current breakers in the circuit under test
- Lead wire connection to C and P terminals and proper auxiliary earth resistance can be checked by "OK" lamp
Lead wire connection to C and E terminals is good when "OK" lamp is illuminated (4102A only)



Soft case model



Hard case model

**COSINUS Messtechnik - Ihr Partner für Messlösungen
in allen elektrischen und physikalischen Anwendungen**

COSINUS Messtechnik GmbH

Rotwandweg 4

82024 Taufkirchen

Tel.: 089 / 66 55 94 - 0

Fax: 089 / 66 55 94 -30

**office@cosinus.de
www.cosinus.de**