

## RCTrms-3ph

Industrially specified true rms ac current transducer



## RCTrms-3ph - Thin, flexible, clip-around, ac current transducer with true rms measurement

The RCTrms-3ph is a 3-Channel ac current transducer for permanent installation. Simple to install and easy to retrofit it combines the benefits of a thin, flexible, clip-around Rogowski (sense) coil with a signal conditioner providing accurate, true rms measurement, of ac current.

The RCTrms-3ph has an industry standard 4-20mA or 0-5V output making it ideal for process control, status alarming or system monitoring purposes. Typically the RCTrms is used with SCADA systems, PLCs, data loggers

The RCTrms-3ph is a 3-Channel ac current transducer providing a 4 to 20mA or 0 to 5V output proportional to the true RMS of the primary current and has the advantages of:

- Easy to retrofit
- Simple to install in applications where space is limited
- The size of the Rogowski coil can be specified independently of the primary current
- Does not suffer from magnetic saturation
- Ideal for process control, status alarming or system monitoring in a wide variety of applications, from arc furnaces to power distribution.

# RCT<sub>rms-3ph</sub>

## Specifications



Rated current (rms)	100A	2000A	10000A
	250A	2500A	16000A
	500A	3000A	20000A
	800A	4000A	25000A
	1000A	5000A	40000A
	1600A	8000A	50000A

<b>Rated output (Full scale FS)</b>	4 to 20mA-or- 0 to 5V output
-------------------------------------	------------------------------

<b>Output limit</b>	150% FS (28mA or 7.5Vdc)
---------------------	--------------------------

<b>Supply voltage (Wide input)</b>	12Vdc (-10%) to 24Vdc (+20%)
------------------------------------	------------------------------

**Input power** 2.1W (at rated output)

<b>Operating temperature range</b>	-5°C to +65°C ( <i>Integrator</i> ) -20°C to +80°C ( <i>Coil and cable</i> )
------------------------------------	---

<b>Bandwidth (-3dB)</b>	2Hz to 100kHz
-------------------------	---------------

**Max. Response time (10 to 90%)** 1000ms


<b>Accuracy (typ.)</b>	± 1.0% of reading (0 - 5V) ± 1.5% of reading (4 - 20mA) (10% to 150% FS, 25°C)
------------------------	--

<b>Output load</b>	<300Ω for 4 - 20mA output > 1kΩ for 0-5V output
--------------------	--


<b>Coil Length</b>	300mm, 500mm or 700mm <i>Custom lengths available</i>
--------------------	--

<b>Cable Length</b> <b>(coil to electronics)</b>	1m or 2.5m <i>Custom lengths available</i>
---	---

## Connections

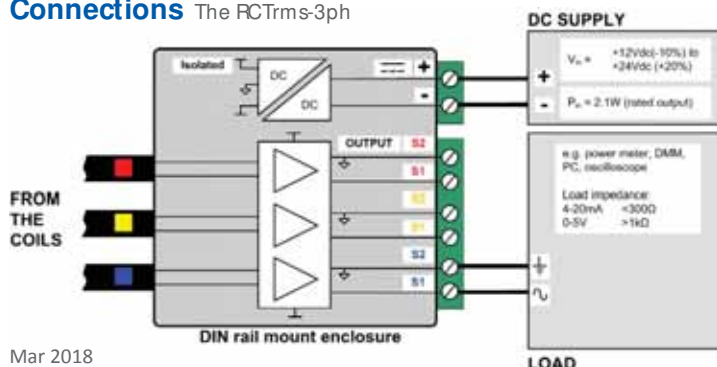

## Dimensions

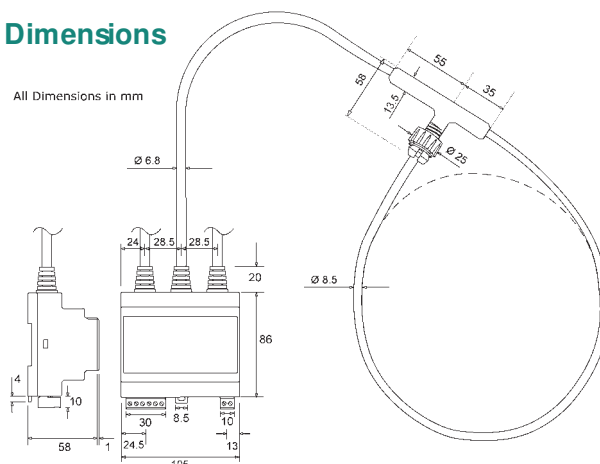

## Features

- **Traceable calibration**
  - Every unit is supplied with a traceable calibration certificate
  - No magnetic materials means excellent linearity <0.1% reading
- **Fully isolated measurement**
  - Isolated power supply 2kVdc
  - Coil rated at 2kVpeak (withstand test is 4kVrms/50Hz/ 60 sec)

- Small DIN rail (or panel mount) enclosure – UL94 V-0 rated

## Options

- **Isolated BNC-BNC cable split option**
  - Between coil and electronics to enable ease of installation e.g. threading through existing conduit. Standard cable permanently fixed.

## Standards and Approvals

- CE marked
- Complies with EMC EN 61326-1 2006
- Complies with IEC61010-1:2001

**Order code RCTrms-3ph**

The RCTrms-3ph order code can be generated as follows:

Output	Rated current (A)	Cable length (m)	Coil length (mm)	Options
420	250	1	300	BC
(4 to 20mA)	500	2.5	500	BNC Cable Split
	-	-	700	
005	-	-	-	
(0 to 5Vdc)	50000	Custom lengths	Custom lengths	

**For example: RCTrms3ph/ 420/ 2000/ 1/ 700** has a rated primary current 2000A, 4-20mA Output, 1m cable 700mm coil no options

## Further information

The RCTrms-3ph can be configured to suit a great many applications. If your requirement is outside that listed in this datasheet please contact us to discuss your application.

Cosinus Messtechnik GmbH  
Rotwandweg 4  
D-82024 Taufkirchen  
Tel 089-665594-0  
Fax 089-665594-30  
e-Mail: [office@cosinus.de](mailto:office@cosinus.de)  
Internet: [www.cosinus.de](http://www.cosinus.de)

**COSINUS Messtechnik - Ihr Partner für Messlösung  
in allen elektrischen und physikalischen Anwendungen**

**COSINUS Messtechnik GmbH**

Rotwandweg 4

82024 Taufkirchen

Tel.: 089 / 66 55 94 - 0

Fax: 089 / 66 55 94 -30

[office@cosinus.de](mailto:office@cosinus.de)  
[www.cosinus.de](http://www.cosinus.de)