


Precision Impedance Analyzers

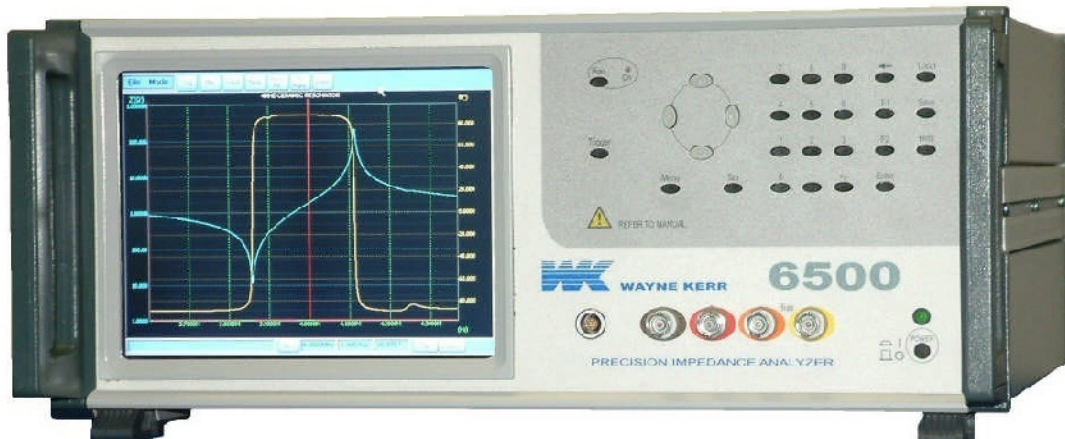

6500B family of 7 models

20Hz – 120MHz

- Characterize components from 20Hz to 120 MHz
- Models defined by their maximum frequency which ranges from 5MHz to 120MHz
- Precise high frequency impedance measurements
- 0.05% basic measurement accuracy
- Comprehensive measurement functions
- Easy to use with large TFT touch screen
- Clear graphic displays
- Intuitive user interface
- Fully programmable over GPIB
- Replaces 6500A series
- Competitively priced

The 6500B series of Precision Impedance Analyzers provide precise and fast testing of components at frequencies up to 120 MHz. Basic measurement accuracy is $\pm 0.05\%$ making the instruments the best in their class.

The accuracy and versatility makes these precision instruments the ideal choice for many different tasks and applications including passive component design, dielectric material characterisation and manufacturing test.

Engineers need to evaluate component characteristics at high frequencies with very high levels of accuracy. The 65120B 120MHz Precision Impedance Analyzer is therefore ideal for many demanding tasks, combining accuracy and ease of use at an affordable price. If a frequency range up to 120MHz is not required then the other models are available in this range.

Measurement parameters

- Impedance (Z)
- Phase Angle (θ)
- Capacitance (C)
- Dissipation Factor (D)
- Inductance (L)
- Quality Factor (Q)
- Resistance (R)
- Reactance (X)
- Conductance (G)
- Susceptance (B)
- Admittance (Y)

High measurement accuracy

Capacitance, inductance and impedance basic accuracy is an excellent $\pm 0.05\%$. Dissipation factor accuracy is ± 0.0005 and the quality factor accuracy is $\pm 0.05\%$.

Graphical sweep of components

The 6500B series of Precision Impedance Analyzer are highly accurate high frequency component analyzers with a host of useful features.

Graphical sweep of two measured parameters is available and displayed on the large clear colour display. Swept parameters are frequency, drive level and DC bias.

Display formats available include series or parallel equivalent circuit.

For single frequency measurements a meter mode is available.

Variable drive and bias levels

AC drive levels up to 1V or 20mA can be selected to evaluate components in realistic operating environments. /D1 DC bias option provides 0 to +40V dc bias voltage and 0 to +100mA dc bias current. /D2 option provides -40V to +40V dc bias voltage.

External control

The GPIB interface is used to control the instrument and read back measured values for applications such as quality control or for archiving purposes.

An Ethernet interface* similarly allows the instrument to be controlled and to send out data - allowing it to be integrated into many test environments.

Wide range of interfaces

An external monitor or projector may be connected to the instrument. The ability to provide a large screen display of measurement results is invaluable in production environments or for teaching and training.

Instrument control from both a keyboard and mouse is available. Any keyboard or mouse, with either a PS/2 or USB interface, can simply be connected to provide an alternative method of instrument control and operation.

Data storage and retrieval

All measurement and setup data can be stored using the Ethernet interface* or a USB flash memory (supplied as standard).

Setup Data

Up to 20 instrument setups may be locally stored for each mode.

Bin handling option

/B1 option (non-isolated 5V) or /B2 option (isolated 24V) signals are available through a 25-way D-type connector. 10 bins can be set using absolute or percentage limits.

Printer outputs

Hard copy printouts can be obtained in a number of ways including direct to an HP-PCL compatible graphics printer or Epson compatible text/ticket printer. A networked HP-PCL compatible printer may also be used via the Ethernet connection.

Component connections

Four front panel BNC connectors permit three or four terminal connections with the screens at ground potential.

The 1J1011 Component Fixture, supplied as standard, ensures optimum performance when measuring a wide range of leaded components and devices.


1J1012 (2 terminal) and 1J1014 (4 terminal) SMD Fixtures allow connection to surface mount devices.

Protection against charged capacitors

High precision measuring instruments can be damaged by charged capacitors which can cause costly repairs and unacceptable downtime. All the models in the range incorporate protection against charged capacitors.

Comprehensive and precise component tests at higher frequencies

The 6500 series is best summarised by "Comprehensive and precise component tests at higher frequencies". The instrument is the perfect solution for those who have demanding component measurement needs.

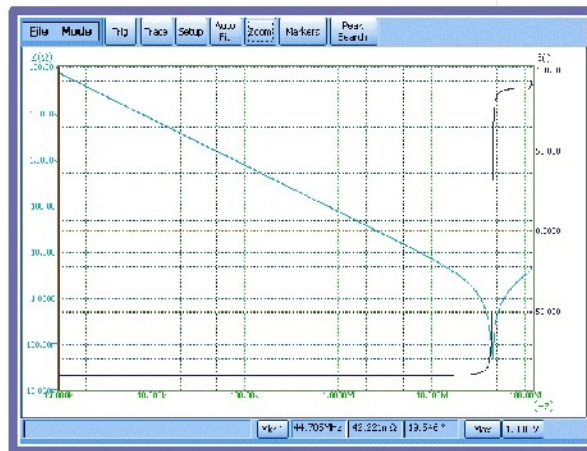

Simultaneous plot of impedance and phase displayed against frequency on a clear colour display

* Future Enhancement

Technical specifications

Measurement parameters

Any of the following parameters can be measured and displayed:

AC functions

- Impedance (Z)
- Phase Angle ($\varnothing$)
- Capacitance (C)
- Dissipation Factor (D)
- Inductance (L)
- Quality Factor (Q)
- Resistance (R)
- Reactance (X)
- Conductance (G)
- Susceptance (B)
- Admittance (Y)

Display format

Series or parallel equivalent circuit – all parameters

Test conditions

Frequency range

6505B 20Hz to 5MHz

6510B 20Hz to 10MHz

6515B 20Hz to 15MHz

6520B 20Hz to 20MHz

6530B 20Hz to 30MHz

6550B 20Hz to 50MHz

65120B 20Hz to 120MHz

Frequency step size: 0.1mHz

Accuracy of set frequency $\pm 0.005\%$

AC drive level

10mV to 1Vrms*

200 μ A to 20mA_{rms}*

*Varies with frequency

Signal source impedance: 50 Ohm nominal

DC bias

Option /D1

0 to +100mA dc bias current

0 to +40V dc bias voltage

Option /D2

-40V to +40V dc bias voltage

Binning (optional)

10 bins with absolute and percentage limits.

25 way D-type interface connector.

Option /B1 (non-isolated)

Common 0V. Bin outputs 0 to 5V(nominal) with >10mA current sink capability.

Option /B2 (isolated)

Common 24V input. Outputs 0 to 24V with >10mA current source capability.

Mode of operation

Graphical sweep mode

Allows graphical sweep of any two measurement parameters

Swept parameters: - frequency, drive level or DC bias

Meter mode

Allows the instrument to be used as a standard LCR meter

Setup Data

Up to 20 instrument setups may be locally stored for each mode.

Measurement connections

Four front panel BNC connectors permit three or four terminal connections with the screens at ground potential.

1J1011 Component Fixture (supplied as standard) allows connection to leaded components and devices.

1J1012 (2 terminal) and 1J1014 (4 terminal) Fixtures allow connection to surface mount devices.

Measurement accuracy

Dissipation factor

$\pm 0.0005 (1 + D^2)^*$

Quality factor

$\pm 0.05 \% (Q + 1/Q)^*$

Capacitance / Inductance / Impedance

$\pm 0.05\%*$

*Varies with frequency, drive level and measured impedance

General

Power Supply

Input voltage 90VAC to 264VAC (Autoranging)

Mains frequency

47Hz to 63Hz

Display

8.4" VGA (640 x 480) colour TFT with touch panel

Local Printer

HP-PCL compatible graphics printing

Centronics / parallel printer port, Epson compatible text / ticket printing

Network Printer

HP-PCL compatible graphics printing

Tel.: 089-665594-0 * Fax: 089-665594-30 * Web: www.cosinus.de * eMail: office@cosinus.de